
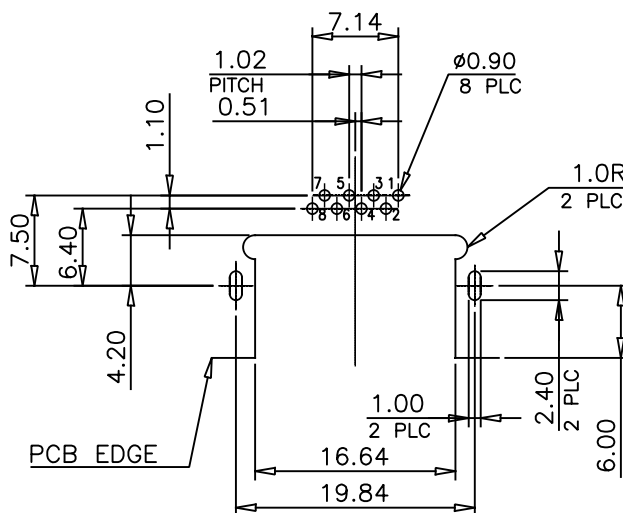
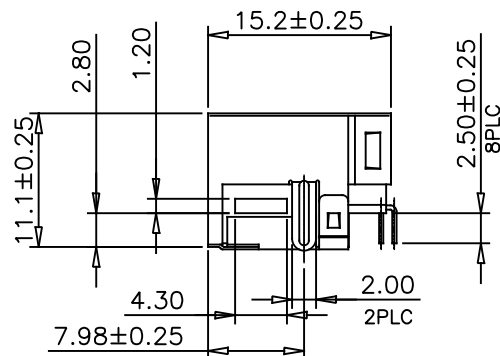
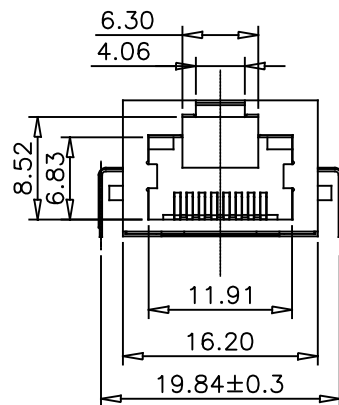




RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)
TOLERANCE: ± 0.05

MATERIALS:

HOUSING: HIGH TEMPERATURE ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0, COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE

PLATING: SELECTIVE GOLD PLATING ON MATING
SURFACES SEE AMPHENOL PART NUMBER
FOR DETAIL: 50 μ " [1.27 MICRONS] MIN. NICKEL UNDERPLATE
100 μ " TIN PLATING ON CONTACT SOLDER TAIL.

SHIELD: COPPER ALLOY PLATED NICKEL.

OPERATING TEMPERATURE: -40° ~ 85°

AMPHENOL PART NUMBER: RJE2K-188-2X03

GOLD PLATING
0 = GOLD FLASH
1 = 6 μ INCH
2 = 15 μ INCH
3 = 30 μ INCH
4 = 50 μ INCH

UNLESS SPECIFIED OTHERWISE		DRAWN <i>STEVE.X</i> DATE <i>AUG 28/20</i>		Amphenol Canada Corp.	
PRIMARY UNITS MILLIMETER		CHECKED		Commercial Products	
SECONDARY		M.E. APP'D		TITLE	
REFERENCE IN PARENTHESES		Q.A. APP'D		1 PORT MODULAR JACK, WITHOUT LED, SHIELD WITH INNER TAB, 8P8C	
GENERAL TOLERANCES		DWG APPR.		-RoHS COMPLIANT	
1 DECIMAL PLACE ± 0.30		ENG. REL. NO.		DWG. NO.	
2 DECIMAL PLACES ± 0.25		REF.		P-RJE2K-188-2X03	
3 DECIMAL PLACES ± 0.20		THIRD ANGLE PROJECTION		REV <i>C</i>	
ANGULAR DEGREES $\pm 1.0^{\circ}$		DO NOT SCALE DRAWING		CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1	