


ePower-lite 系列插头拆装指导书


ePower-Lite Series Plug Connectors

Remove Pins Illustration

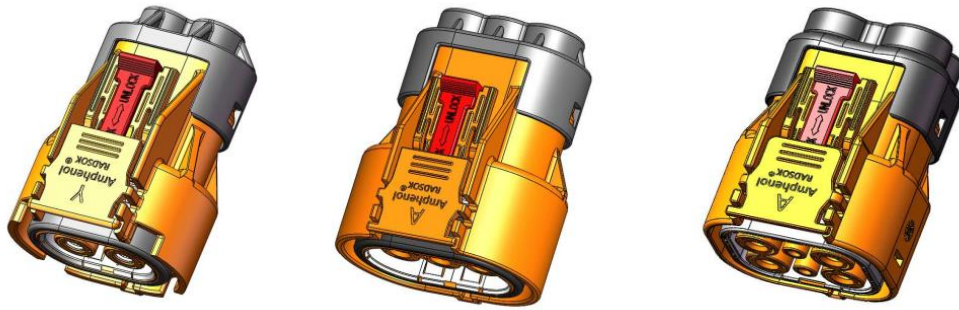

Revision	Description	Issue Date
A	Initial release	2020/05/27

1. 拆装工具描述 Remove pins tool illustration.

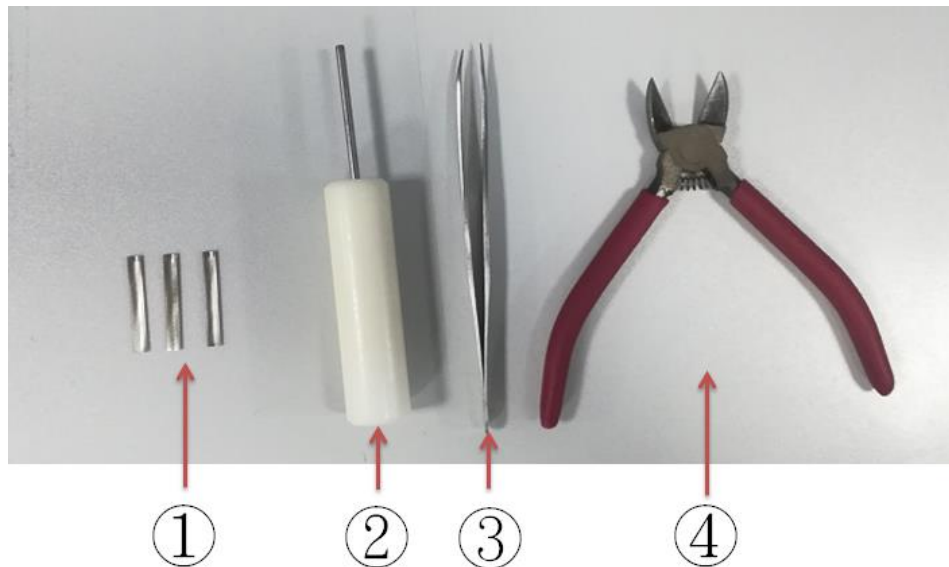

Item 序号	P/N 料号	Part description 零件描述	Qty 数量	Notes 备注
1	FX3-0000-002	金属片 Metal sheets	3 pcs	
2	FX3-0000-003	顶针 Thimble	1 pcs	
3	/	镊子 Tweezer	1 pcs	
4	/	钳子 Plier	1 pcs	

2. 拆装工具使用步骤 Remove tool usage steps:

2.1 拆除线夹：用镊子或钳子撬起锁扣位置，然后晃动打开线夹； Pry the cable cover with Plier or tweezor, and remove cable cover;



2.2 拆除封线体：用镊子沿着周边向上把封线体打开； Pry around the grommet, and remove grommet;



2.3 拆除端子： Remove pins

1) 把3片金属片放进壳体槽里; Put 3pcs metal sheets into plug shell



2) 确保到底同时三个金属片是平的; Insure 3pcs metal sheets are reach the bottom.



3) 用顶针穿入孔中间; Put in the thimble.



4) 用钳子轻敲打顶针至端子向后脱落;Strike the thimble with plier, insure the pin drop out from plug shell



5) 重复以上方法拆除其他端子; Repeat all above method, and remove other pins;



注意 Notes:

- 1) 上述为两芯拆装过程说明，其他的三芯四芯用相同方法拆装即可； **It is 2ports plug remove pins illustration all above, and other 3&4 ports plug use the same method.**
- 2) 拆装后出现损坏的零件，不能进行重复使用； **The components which has any broken will not be reused after remove out from plug shell.**